

Customer Information Sheet

DRAWING No.: S1711-XX

SHEET 2 OF 2




IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

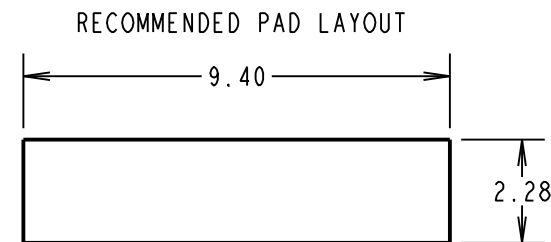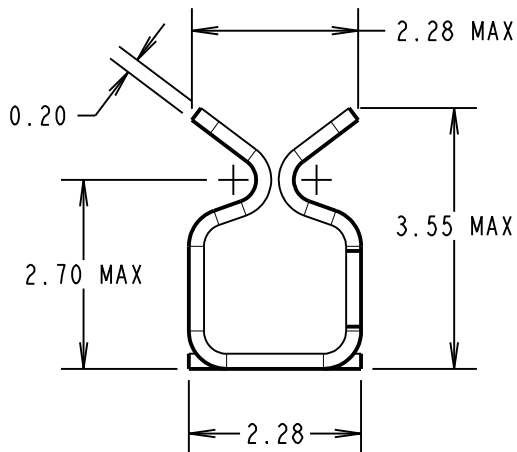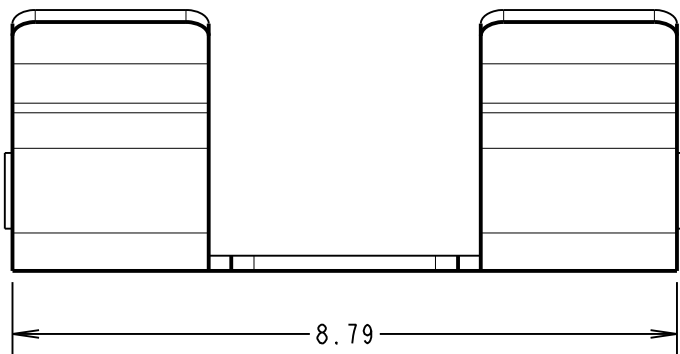

ORDER CODE:


S1711-XX

FINISH: _____
 06 = TIN/LEAD
 46 = 100% TIN OVER NICKEL



- NOTES:
 1. FOR TAPE AND REELED VERSION, SEE DRAWING S1711-XXR.
 2. SUPPLIED IN A STRIP OF 100, PACKED IN A BAG.

RECOMMENDED SHIELD CAN CUT OUT

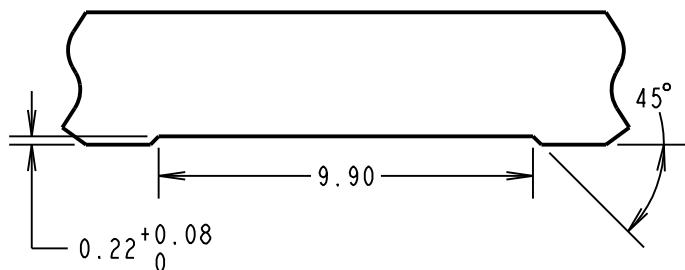

SPECIFICATION:

MATERIAL = BERYLLIUM COPPER

FINISH:

06 = 3μ 90/10 TIN/LEAD

46 = 3μ 100% TIN

ELECTRICAL:

CONTACT RESISTANCE = 20mΩ MAX

ENVIRONMENTAL:

OPERATING TEMPERATURE = -40°C TO +125°C


MECHANICAL:

INSERTION FORCE (AFTER CONDITIONING) = 4N MAX

WITHDRAWAL FORCE = 0.5N MIN

DURABILITY = 20 INSERTIONS MINIMUM

SHIELD THICKNESS = 0.17mm - 0.30mm

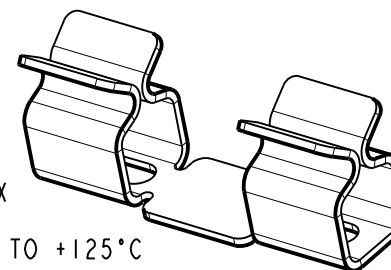

MSP	8	27.09.16	13518
NAME	ISS.	DATE	C/NOTE
APPROVED: M.PERREN			
CHECKED: S.BENNETT			
DRAWN: J.ENRIGHT			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
 X.X = ±0.50mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
 ANGLES = ±5°
 UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

SMT RFI SHIELD CLIP
 (LOOSE)

DRAWING NUMBER:

S1711-XX

SHT
 2 OF 2