

4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket



Description


- pre-assembled cable
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole , straight

Technical Data

Diameter	5.5 mm / 2.5 mm	Allowable Operation Temperature	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	Cable
Ratings DC	1.0 A / 12 VDC	Cord Length	1.8 m
Dielectric Strength	500 VDC	Cable Cross Section	2 x 0.3 mm ²
Insulation Resistance	> 100 MΩ @ 500 VDC	Style	straight
		Lifetime	5000 Insertions

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions

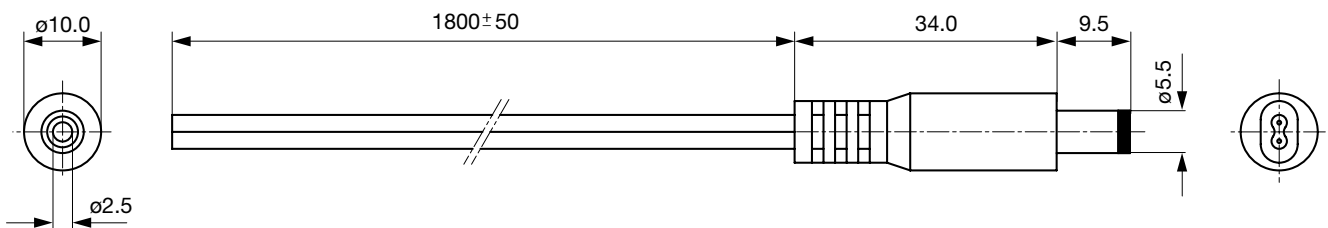

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	5.5	2-pole	Cable	4840.5210

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 200 Pcs

Mating Outlets/Connectors

Category / Description



[DC Plug/Socket Overview complete](#)

4840, solder terminal, Socket, 6.3 mm, 2-pole, DC Plug/Socket	4840.2210
4840, PCB terminals, Socket, 6.0 mm, 2-pole, DC Plug/Socket	4840.2211
4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.5212

[DC Plug/Socket further types to 4840.5210](#)