

# Valve connectors - SACC-V-3CON-PG9/BI-1L-SV 24V - 1527896

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Valve connector, 3-pos., type BI, 1 LED, protective circuit, screw connection, cable screw connection Pg9



## Key Commercial Data

Packing unit	1 STK
GTIN	
GTIN	4017918981044

## Technical data

### Dimensions

External diameter	6 mm ... 8 mm
-------------------	---------------

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C (valve plug)
Degree of protection	IP65

### General

Rated current at 40°C	10 A
Rated voltage	24 V
Number of positions	3
Insulation resistance	≥ 100 MΩ
Status display	1 LED
Protective circuit/component	Varistor
Overvoltage category	II
Degree of pollution	3
Connection method	Screw connection
Conductor cross section	0.34 mm² ... 1.5 mm²
Conductor cross section AWG	22 ... 16

# Valve connectors - SACC-V-3CON-PG9/BI-1L-SV 24V - 1527896

## Technical data

### Material


Flammability rating according to UL 94	HB
Valve plug contact material	CuZn
Valve plug contact surface material	Ni
Valve plug contact insert material	PA6
Material housing valve plug	PA6
Sealing material	NBR

### Standards and Regulations

Flammability rating according to UL 94	HB
--	----

## Drawings

Circuit diagram

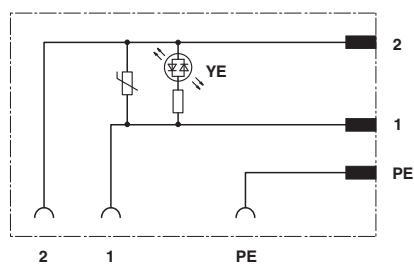

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>